

808

Issued: 01/06/05
Revised: 28/05/07

P A C K A G I N G T A P E S

Premium Grade PVC Self Adhesive Tape

APPLICATIONS

- Medium to heavy packages.
- For sealing boxes and many other packaging applications subjected to rough shipping conditions or that require a higher sealing performance.


FEATURES & BENEFITS

- Silent unwinding
- Can be used manually or with taping machines.
- Ideal for printing.
- Hand tearable.
- Resistant to chemicals

SHELF LIFE:

12 months from the date of manufacture by Eivotape if properly stored in a clean and dry place at 23°C @ 50% rh

CONSTRUCTION

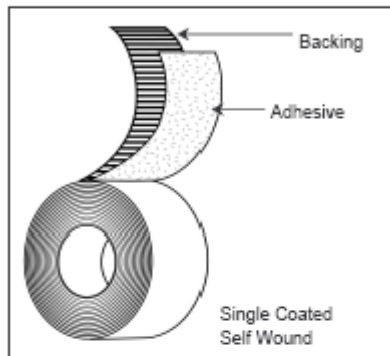

PRODUCT DESCRIPTION

Backing:
Polyvinylchloride

Adhesive:
Natural Rubber Adhesive

Colors:
Clear, White, Brown

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	54±5	μ	AFERA 4006
Film Thickness	33±3	μ	AFERA 4006
Adhesion	2,7±0,3	N/cm	INTERNAL METHOD
Tensile Strength	50±5	N/cm	AFERA 4004
Elongation at Break	70±20	%	AFERA 4005

Typical values are not intended to be used for specification purposes.

Technical data is believed to be true and accurate but they are not guaranteed.

We recommend the purchaser to test the fitness and suitability for the intended use for all applications.

Above data derive from tests effected in our laboratories, selected from standard production runs, and do not imply any suitability guarantee. User must preliminarily verify the suitability of the product for the intended specific application and use.

The Company expressly declines whatever responsibility in case of direct or indirect damages and consequential loss deriving from inappropriate use of the products.