

# 813

Issued: 01/06/05  
Revised: 28/05/07

## P A C K A G I N G T A P E S

Utility Grade Hot Melt BOPP Self Adhesive Tape

### APPLICATIONS

- Light to medium packages.
- Primarily used for sealing lightweight boxes subjected to minimal shipping hazards


### FEATURES & BENEFITS

- High adhesion.
- Ideal for manual use.
- Resistant to chemicals

### SHELF LIFE:

12 months from the date of manufacture by Evotape if properly stored in a clean and dry place at 23°C & 50% Relative Humidity

### CONSTRUCTION

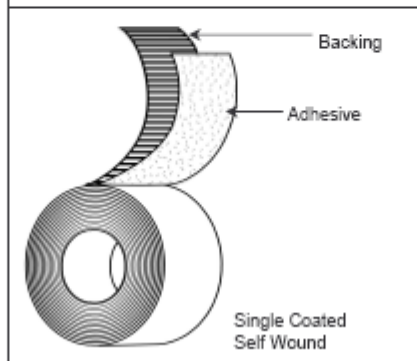

### PRODUCT DESCRIPTION

Backing:  
BOPP

Adhesive:  
Synthetic Rubber / Hot Melt  
(Solvent Free)

Colors:  
clear, white & brown

### TEST DATA

| Test                | Typical Value<br>(Metric) | Typical Value | Test Method |
|---------------------|---------------------------|---------------|-------------|
| Total Thickness     | 43,0±3,5                  | μ             | AFERA 4006  |
| Film Thickness      | 25,0±1,5                  | μ             | AFERA 4006  |
| Adhesion            | 4,5±0,5                   | N/cm          | AFERA 4001  |
| Tensile Strength    | 35±5                      | N/cm          | AFERA 4004  |
| Elongation at Break | 150±20                    | %             | AFERA 4005  |

Typical values are not intended to be used for specification purposes.

Technical data is believed to be true and accurate but they are not guaranteed.

We recommend the purchaser to test the fitness and suitability for the intended use for all applications.

Above data derive from tests effected in our laboratories, selected from standard production runs, and do not imply any suitability guarantee. User must preliminarily verify the suitability of the product for the intended specific application and use.

The Company expressly declines whatever responsibility in case of direct or indirect damages and consequential loss deriving from inappropriate use of the products.