

610

Issued: 18/07/05
Revised: 28/05/07

M A S K I N G T A P E S

GP Masking Tape

APPLICATIONS

- Semicrepe paper based masking tape for oven baking painting operations up to 80° C in car body repair and other lacquering applications.
- General purpose masking tape for the building and painting industry as well as the Do-It-Yourself market.

FEATURES & BENEFITS

- Excellent for industrial applications.
- Ideal for auto refinish and repaint.
- Fully crosslinked adhesive


The optimum level for product performance & easy removal is at 80°C for 30/60 minutes

SHELF LIFE:

12 months from the date of manufacture by Evotape if properly stored in a clean and dry place at 23°C & 50% Relative Humidity

6 months for jumbos rolls from the date of manufacture by Evotape if properly stored in a clean and dry place at 23°C & 50% Relative Humidity

CONSTRUCTION

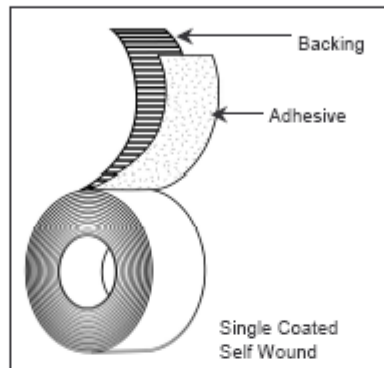

PRODUCT DESCRIPTION

Backing:
Semi Crepe Paper

Adhesive:
Natural Rubber Adhesive

Colors:
White / Yellow / Chamois (avana)

TEST DATA

Test	Typical Value (Metric)	Tolerance	Test Method
Paper Weight	57 g/m ²	±5%	IO/PP11/19
Total Weight	93 g/m ²	±5%	IO/PP11/19
Thickness	0,11 mm	±2%	AFERA 4006
Adhesion To Steel	2,4 N/cm	±15%	PSTC 101
Adhesion To Backing	1,4 N/cm	±15%	PSTC 101
Tack	4 cm	max	PSTC 106
Tensile Strength	30 N/cm	±10%	AFERA 4004
Elongation	9 %	±2%	AFERA 4005
Temperature resistance	80 °C	max	
Width	nominal mm	± 0,5	
Length	nominal m	± 1,5%	

Typical values are not intended to be used for specification purposes.

Technical data is believed to be true and accurate but they are not guaranteed.

We recommend the purchaser to test the fitness and suitability for the intended use for all applications.

Above data derive from tests effected in our laboratories, selected from standard production runs, and do not imply any suitability guarantee. User must preliminarily verify the suitability of the product for the intended specific application and use.

The Company expressly declines whatever responsibility in case of direct or indirect damages and consequential loss deriving from inappropriate use of the products.